



PRORACK

Powered by PROLINK

We provide customers with satisfactory products and services according to international standards, to meet different customer needs.


Description

ProRack 9U-outdoor wall mount ,size (600mm*450mm) 70cm thickness 1.5mm, included (1 key lock) IP rating 66,solid door.


ProRack 12U-outdoor wall mount ,size (600mm*650mm) 70cm thickness 1.5mm, included (1 key lock) IP rating 66,solid door.




Main material:

 Cold-rolled steel

Load capacity:










 Static load: 800KG

Surface treatment:

 Degreasing, pickling, phosphating, laundering, powder coating




Features:

-  Exquisite design with precise dimensions and craftsmanship
-  Two side panels for each side can be separately open with locks, which are easy to operation and maintenance
-  Two back sides with multifunctional cable routing panels
-  High-class locks
-  Casters and support feet can be installed simultaneously
-  Optional pedestals for fixation, cable routing, ventilation, and rat proof
-  Curved front screen door & back double screen door enable equipment to ventilate well
-  Various optional accessories
-  Pro-Rack logo is printed on the side panel

Structure:

1. Top cover
2. Bottom plate
3. Fans
4. Frame
5. Front door
6. Side panel
7. Horizontal bracket
8. Profile rails
9. Shelf
10. Caster
11. Support foot

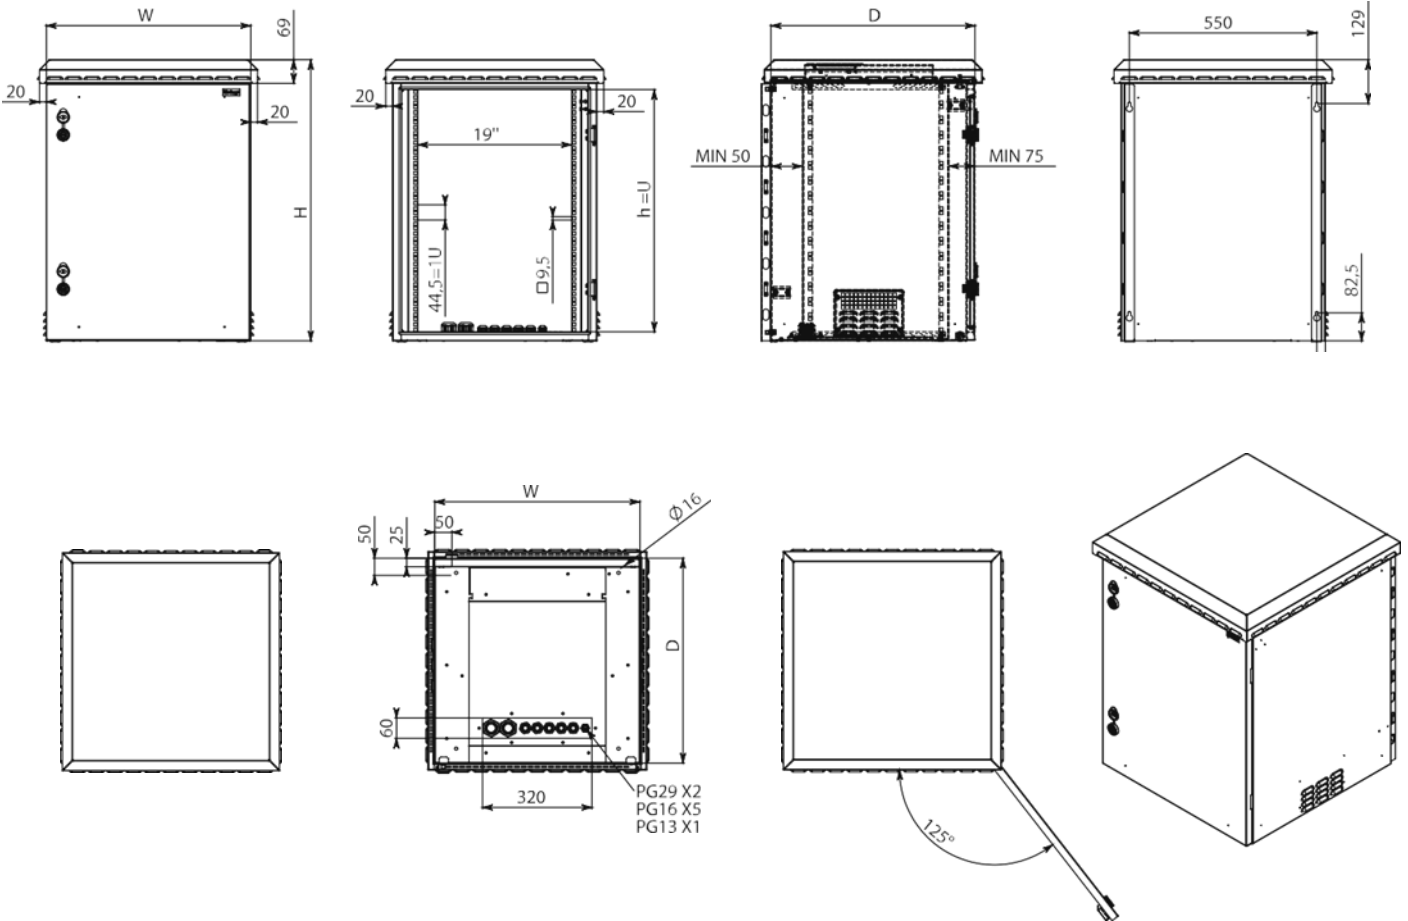

Technical parameters:

NANES	QUANTITY	UNIT	MATERIALS	SURFACE TREATMENT	REMARKS
Top Covers	1	Pc	1.2mm cold-rolled steel	powder coating	
Bottom plates	1	Pc	1.2mm cold-rolled steel	powder coating	
Fans	2	Pc	1.2mm cold-rolled steel	powder coating	
Frames	2	Pc	1.2mm cold-rolled steel	powder coating	
Front doors	1	Pc	5mm tempered glasses 1.2mm cold-rolled quality steel	powder coating	door type E or B
Side panels	2	Pc	1.0mm cold-rolled steel	powder coating	
Rails	4	Pc	2.0mm cold-rolled steel	powder coating	
Shelves	1	Pc	1.2mm cold-rolled steel	powder coating	
Casters	4	Pc			
M12 support feet	4				
Cage nuts	20				
Sockets with 8 outlet	1				
Beams	6	Pc	1.2mm cold-rolled steel	powder coating	
Junction boxes	12	Pc	2.0mm cold-rolled steel		

Technical parameters:

TYPES	Product code	
	PR-OD6409	PR-OD6612
CAPACITY (U)	9U	12U
WIDTH	600	600
DEPTH	450	600
HEIGHT	515	648
WHOLE PACKAGE		
WIDTH	660	660
DEPTH	510	660
HIGHT	630	763
Gross product weight (kg)	30	43
FLAT PACKAGE		
Pallet dimension WxDxH (mm)	650x500x100	650x650x100
Packaging size WxDxH (mm)	660x510x630	660x660x763
Net product weight (kg)	26.5	40