



# PROLINK

We provide our customers with exceptional **PRODUCTS** in accordance with the highest international standards and also provide **SERVICES** that meets our customers' needs or exceed their expectations

**Copper System**

**CAT6A Category**

# Copper cables

## CAT6A U/UTP – S/FTP



### CAT. 6A U/UTP

ProLink CAT6A U/UTP CABLE, 4 PAIR 23 AWG, LSZH, White, 305 m length Reel in a box

**Conductor:** Solid copper wire AWG23 ( $\varnothing$  0.58mm).  
**Insulation:** Polyethylene  $\leq \varnothing$  7.0 mm.  
**Cable lay up:** 4 pairs to the core, non-metallic cross separator (spline).  
**Cable core lying:** Waterproof compound to prevent moisture migration and water protection.  
**Sheath:** White, LSZH

**Conductor:** Bare solid copper wire AWG23 ( $\geq \varnothing$  0.56 mm)  
**Insulation:**  $\leq \varnothing$  1.35 mm Nominal  
Twisting: 2 cores to the pair, ( Shielded & Foil twisted pair )  
**Cable lay up:** 4 pairs to the core  
Cable core lying: Waterproof compound to prevent moisture migration and water protection.  
**Sheath:** White, LSZH



### CAT. 6A S/FTP

ProLink CAT6A S/FTP CABLE, 4 PAIR 23 AWG, LSZH, White, 305 m length Reel in a box

# Patch Cord

## CAT6A U/UTP – S/FTP



### PROLINK CAT6A UNSHIELDED PATCH CORD W/ T568B WIRING LSZH.

#### CAT.6A U/UTP Patch Cords

PROLINK Cat.6A U/UTP patch cords are used for connecting the network equipment to patch panels and telecommunications outlets. They are suitable for frequencies of up to 500 MHz

#### Features of CAT.6A U/UTP

- Full the requirements of Category 6A U/UTP, Class E (650MHz) according to
- the present standard of the ISO/IEC 11801.
- Each individual patch cord is tested and marked with a quality stamp.
- Can also use as Cat5e (backward compatible).
- Strain relief is provided with wide function.
- Labeling possible on the strain relief or on the color-coding.
- 1M, 3M, 5M or 10M length.
- The impedance of 100 ohms.
- LSZH version.
- Die rent Colors (Blue – White – Gray – Yellow – Black – Orange).

### PROLINK CAT6A SHIELDED PATCH CORD W/ T568B WIRING LSZH.

#### CAT.6A S/FTP Patch Cords

PROLINK Cat.6A U/UTP patch cords are used for connecting the network equipment to patch panels and telecommunications outlets. They are suitable for frequencies of up to 650 MHz

#### Features of CAT.6A S/FTP

- Full the requirements of Category 6A S/FTP, Class E (650MHz) according to
- the present standard of the ISO/IEC 11801.
- Each individual patch cord is tested and marked with a quality stamp.
- Can also use as Cat5e or cat6 (backward compatible).
- Strain relief is provided with wide function.
- Labeling possible on the strain relief or on the color-coding.
- 1M, 3M, 5M or 10M length.
- The impedance of 100 ohms.
- LSZH version.
- Die rent Colors (Blue – White – Gray – Yellow – Black – Orange).



# KEYSTONE JACK & RJ plug

CAT6A  
U/UTP- S/FTP

PROLINK



Cat6A U/UTP

ProLink  
**CAT6A UTP 10G** keystone **jack Mini Type**, Tool-less  
Connection Module



Cat6A S/FTP

ProLink  
**CAT6A S/FTP 10G** keystone **jack Mini Type**, Tool-less  
Connection Module



Cat6A STP


ProLink  
**CAT6A STP** Connector, **10G RJ45**, Tool-less Connection  
Module

<http://prolink.us.com>

# Accessories

## Patch Panel & Cable Management

**PROLINK**

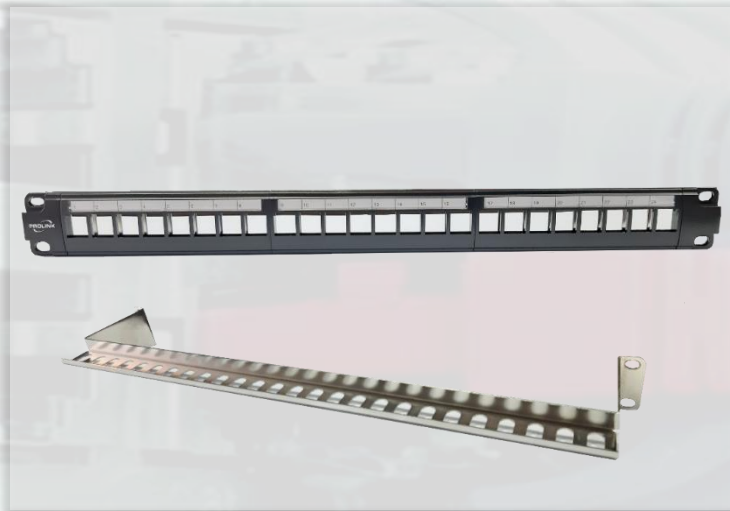

**Prolink Patch Panel 1U, 24 Port FTP, With Wire Management**



**ProLink Cable Management, 1U, Plastic**



**ProLink Cable Management, 1U, Metal**

<http://prolink.us.com>

# Accessories

Faceplate uk



**BRITISH FACEPLATE**

**ProLink 1 Port UK type** Faceplate  
W/Shutter & Station 1 ID 86\*86



**BRITISH FACEPLATE**

**ProLink 2 Port UK type** Faceplate  
W/Shutter & Station 1 ID 86\*86



**Back Box**

# Accessories

## Faceplate UK



**BRITISH FACEPLATE Frame**

**UK type Faceplate White 86\*86**




**Clip Adapter**

**Clip Adapter 1,2 Port White 45\*45**



**Clip Adapter**

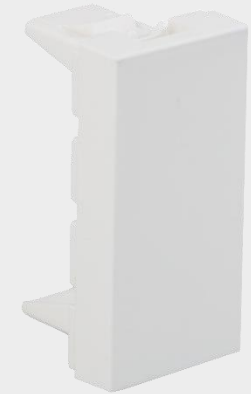


**Clip Adapter**

**Clip Adaptor 45\*22.5 Blank Port**

# Accessories

## Faceplate US

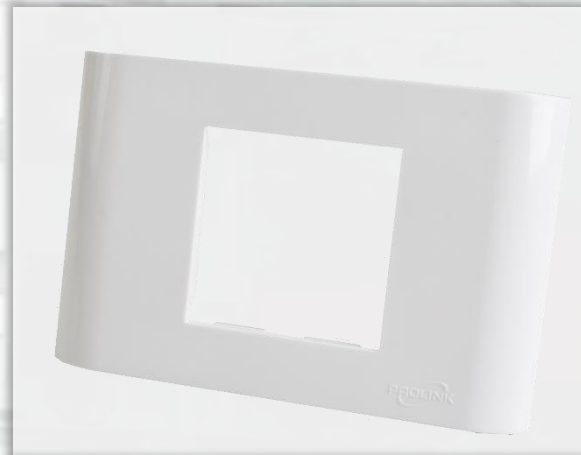

**US FACEPLATE Frame**

ProLink US type Faceplate White 2 Port



**US FACEPLATE Frame**

ProLink US type Faceplate White 3 Port



**Clip Adapter**

ProLink Clip Adapter 1,2 Port White 45\*45



**Clip Adapter**